

Weatherproof Telephone ResisTel

Application

Our new weatherproof outdoor telephone is in operation with precision, great comfort and reliability. The telephone is programmable and resists all environmental atmospheres: seawater, high humidity or dust.

The telephone has a stainless steel keypad with 21 keys and can easily be used while wearing gloves. It is well suited to work in outdoor areas like power plants, substations and rough industrial areas.

Technical Data

Housing:	Glass-fibre reinforced polyester
Protection class:	IP 66
Operation mode:	PD or DTMF dialling Programmable pulse ratio for PD 1,5 :1 or 2:1
Signal key:	Flashfunction adjustable from 40 ms Up to 399ms over menu
Line voltage:	24 V DC up to 66 V DC
Call voltage:	24 V AC up to 90 V AC
Ringing frequency:	16,66 Hz up to 54 Hz
Ringer:	10 melodies adjustable via menu
Ringer volume:	approx. 95 dB(A) at 1m distance wall mounted via menu 6 different volumes adjustable
Loud hearing:	approx. 65dB(A) at 1m distance wall mounted via menu 6 different volumes adjustable
Receiver amplifier:	6- stage from 0 dB up to 12 dB adjustable via receiver amplifier button.
Display:	2- stage alphanumeric displays with piktogram
Keyboard:	21-stage metallic-keypad with ABC-inscription
Menu:	English or German
Telephonebook:	Memory for up to 25 numbers
Ringercontact:	Contact for an external second-ringer
Ambient conditions:	-25°C up to +60°C in temperatureclass T4 -25°C up to +40°C in temperatureclass T6 Handset: Metal armoured cord and hearing capsule with magnetic field for induction coupling with external hearing aid facility
Ext. loudspeaker:	2 contacts for external loudspeaker
Weight:	approx. 5 kg

Ordering Information

Description	Order No.
Outdoor Telephone Resistel	BCTS1067
Outdoor Telephone Resistel without keypad	BCTS1067-1
Second Receiver for Resistel	BCTS1067-2
Headset for Resistel	BCTS1067-3
Loudspeaker Set for Resistel	BCTS1067-3

- IP 66
- Temperature range
- -25 C up to + 60 C
- Steel keypad
- Metal armoured handset cord
- Volume 95 dB(A)
- Receiver volume can be boosted by 7 steps of 0dB (A) each up to 12 dB (A)
- Display 2-stage
- Hands free operation

Option

- External loudspeaker
- Headset
- Secondary receiver






Telecommunications

For further information please contact:

BlueCom AG
Giessenstrasse 15
CH-8953 Dietikon
Tel.: +41 44 748 48 18
Fax: +41 44 748 48 19
E-mail: sales@bluecom.ch
Internet: <http://www.bluecom.ch>

Dimensions:

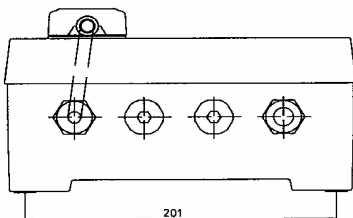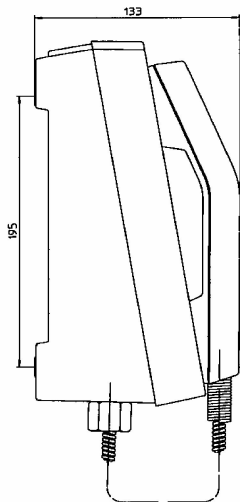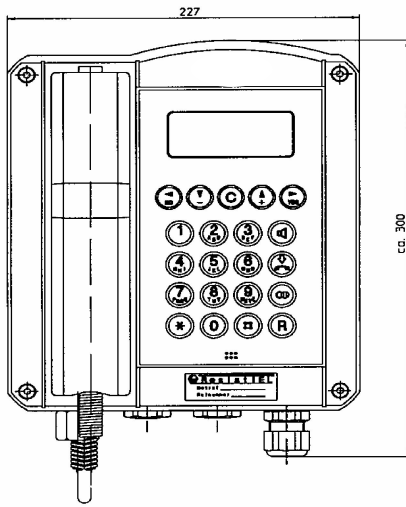

BCTSI1067_DS ED 10/

Printed in Switzerland

Due to continuous product improvements this specification is subject to change without notice



For further information please contact:

BlueCom AG
Giessenstrasse 15
CH-8953 Dietikon
Tel.: +41 44 748 48 18
Fax: +41 44 748 48 19
E-mail: sales@bluecom.ch
Internet: <http://www.bluecom.ch>