

Outdoor Telephone WTS3

Application

The WTS3 telephone set is a rugged, weatherproof unit for use outdoors or in tough ambient conditions. It is designed to operate with all PABX systems featuring central battery voltages from 24 to 60 VDC. A 16-button keypad is provided for dialling. The WTS3 telephone can be delivered with a 16 digit LCD Display. It can be wall or desk mounted. The WTS3 is best suited to be used in industrial areas, power plants, and switchyards.

Technical Data

Casing:	impact strength plastic shock-proof and acid-resisting
Cable gland:	1 x Pg 16 and 1 x blind plug Pg 16
Protection class:	IP66
Ambient Temperature:	-25°C to +55°C without display -10°C to +50°C with display
Weight:	1.7 kg
Dimensions: (W x H x D)	190 x 291 x 128mm
Colour:	yellow
Battery voltage:	24 to 66 V DC
Supply current:	19 to 100mA
Ring frequency:	16 to 68 Hz
Ring voltage:	30 to 90VAC
Ring volume:	95 dB(A) at 1m distance
Input Impedance:	> 6.5kOhm at 25 Hz > 3.5kOhm at 50 Hz
Dialling Speed	10 pulse/s; 60/40ms
DTMF Dialling:	according ITU-T Q.23 Tone duration unlimited or 90ms
Flash Time:	80/120/600ms programmable

- Protection Class IP65
- Ambient Temp. -25°C to +55°C
- Wall or Desk mounting
- Call Buzzer volume 95dB(A), 1m

Ordering Information

Description	Order No.
Outdoor Telephone without Display	BCTS1063
Outdoor Telephone with Display	BCTS1064
Outdoor Telephone without Display and steel armoured cord	BCTS1065
Outdoor Telephone with Display and steel armoured cord	BCTS1066





Telecommunications

For further information please contact:

BlueCom AG
Giessenstrasse 15
CH-8953 Dietikon
Tel.: +41 44 748 48 18
Fax: +41 44 748 48 19
E-mail: sales@bluecom.ch
Internet: <http://www.bluecom.ch>

Dimensions:

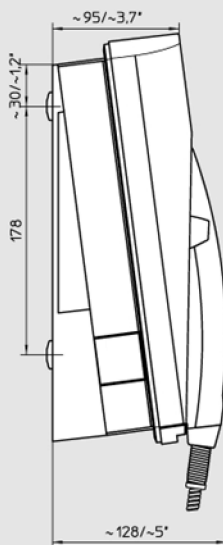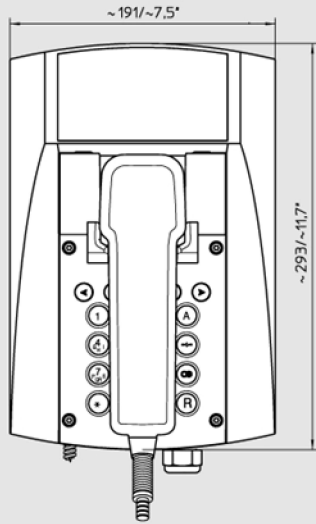

BCrS1063.DS.E0 01/

Printed in Switzerland

Due to continuous product improvements this specification is subject to change without notice



Telecommunications

For further information please contact:

BlueCom AG
Giessenstrasse 15
CH-8953 Dietikon
Tel.: +41 44 748 48 18
Fax: +41 44 748 48 19
E-mail: sales@bluecom.ch
Internet: <http://www.bluecom.ch>